GENERAL DYNAMICS FORT WORTH TX FORT WORTH DIV RESEARCH MODEL WING/TAIL FABRICATION.(U) MAR 82 R A COX F2A-625 N00014-81-C-0680 unclassified END #=1 \$14.0 -5-82 -6-82

F/6 14/2



# AD A 1 1 4 1 0 1

RESEARCH MODEL WING/TAIL FABRICATION

Prepared by:

Aerodynamics Engineer

Approved by:

R. G. Bradley, Manager Aerodynamics







031 03 05 82

## UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Date Entered)

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1	3. RECIPIENT'S CATALOG NUMBER
FZA-535 A 144	104
4. TITLE (and Subtitle)	s. Type of Report a Period Covered Technical Report
Research Model Wing/Tail Fabrication	17 August 1981-18 January 1983
Research hours wang, tall lastication	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(*)	S. CONTRACT OR GRANT NUMBER(s)
Cox, Ronald A.	N00014-81-C-0680
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
General Dynamics, Fort Worth Division P. O. Box 748	P.E. 62241N
Fort Worth, Texas 76101	RF 41-411-801 NR 212-273
11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
Office of Naval Research	March 1982
800 N. Quincy Street	13. NUMBER OF PAGES
Arlington. Virginia 22217 14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)	15. SECURITY CLASS. (of this report)
	Unclassified
	15. DECLASSIFICATION DOWNGRADING
16. DISTRIBUTION STATEMENT (of this Report)	<del></del>
Approved for public release; distribution unlimit  17. DISTRIBUTION STATEMENT (of the ebetract entered in Block 20, if different from	
IS. SUPPLEMENTARY NOTES	
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)	
Transonic Wing Optimization	
Wind-Tunnel Model Pressure Model Horizontal Tail	
HOTIZONTAL TALL	
20. ABSTRACT (Continue on reverse side if necessary and identity by block number) The design and construction of a transonic wind-tur pleted. The 1/7.5-scale model can be equipped with or T-tail. A baseline, linear element wing and an cal planform, but with chordwise airfoil sections of cruise, have been manufactured. One row of pressur and on the horizontal tail.	nnel model has been com- n an all-flying low-, mid-, alternate wing of identi- optimized for transonic

DD 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Date Entered)

### INTRODUCTION

The wind tunnel model design and construction reviewed in this report was sponsored under Contract No. N00014-81-C-0680 and executed by General Dynamics corporation.

The contracted activity spans the period from 17 August 1981 through 18 January 1982.

The program activities were monitored by Dr. Robert E. Whitehead of ONR. The program was managed by Ronald A. Cox of the Fort Worth Division. Clyde Wilkerson was responsible for the design of the wind tunnel model and was the liaison with the model shop.

### MODEL DESCRIPTION

General Dynamics has completed the design and construction of a transonic wind tunnel model to be used in experiments to be conducted in the NASA/Ames Research Center 14-Foot Transonic Tunnel. The effort was in accordance with Phase I of the General Dynamics Proposal No. 81-P-0520 (Technical Proposal FZP-2081). Photographs of the model are shown in Figures 1 and 2.

The 1/7.5-scale model (designated configuration 603E) can be equipped with an all-flying low-, mid-, or T-tail at deflections of -10, 0, or +10 deg. See Figure 3. The horizontal tail has one row of 30 pressure taps (15 upper-port, 15 lower-starboard) at a non-dimensional exposed span station of  $\eta$ = 0.63. These pressures have been moved inboard from the originally specified station of  $\eta$ = 0.75 because of an elevator hinge located at the initial location.


For the mid- and T-tail configurations, the pressure lines are routed through the vertical tail; the low-tail pressure lines through the nacelle/aft fuselage.

A baseline, linear element wing and an alternate wing of identical planform, but with chordwise airfoil sections optimized for transonic cruise, have been manufactured. The baseline (steel) wing and the alternate (aluminum) wing are interchangeable on the model.

Each of the two model wings have one row of pressure taps located at  $\eta$ = 0.545. The wing pressure tap locations have been changed from the initially specified value of 15 upper-port/10 lower-starboard to 17 upper/8 lower in order to better capture the wing upper surface shock location.

The pressure scanivalves will be housed in the model nose. Three static pressure orifices are located in the sting-cavity area.

The planned run schedule for the transonic wind-tunnel test is listed in Table 1.

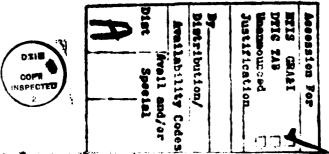

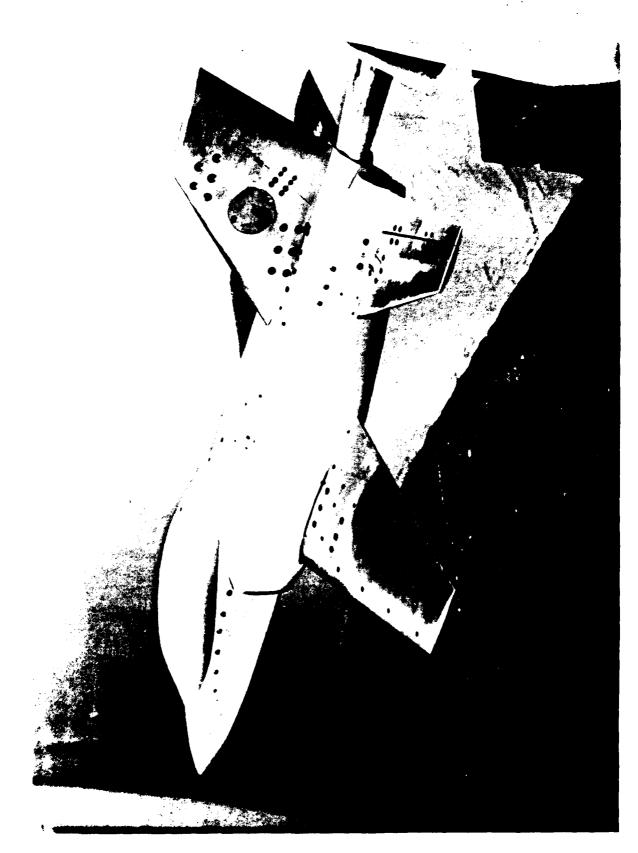


Figure 1. Configuration 603E Wind-Tunnel Model



Figure 2. Configuration 603E Wind-Tunnel Model

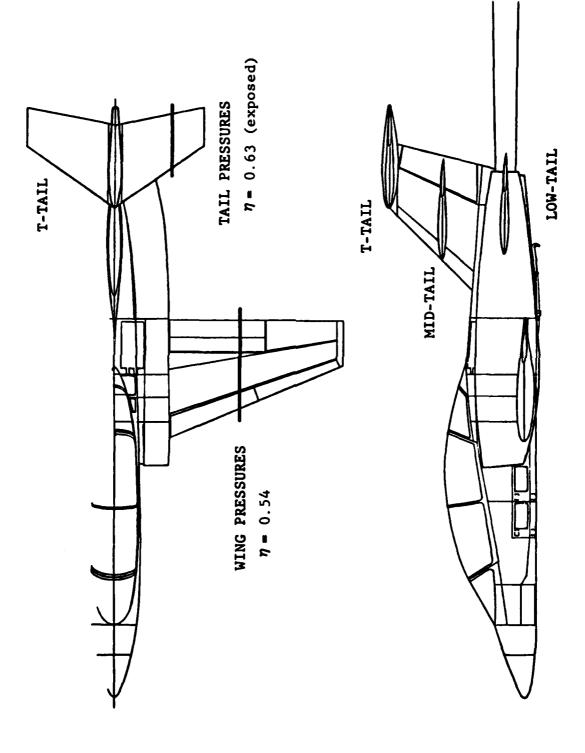


Figure 3. Configuration 603E Tail and Pressure Row Locations

REMARKS	PRESSURE DATA														FORCE DATA	(Inverted)													-
.95						×								×	×	×													×
96						×								×	×	×													×
.85	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
.82						×								×	×	×													×
.80 .8						×								×	×	×													×
MACH . 78	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
7.						×								×	×	×													×
.70						×								×	×	×													×
9.	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
6 HORIZ.	-10	ಿ	+10%	ಿ	ಿ	OFF	-10	<b>°</b> ,	-10°	<b>'</b>	-10	<b>'</b>	-100	OFF	OFF	OFF	-10	<b>'</b>	-10°	90	10,	<b>.</b>	-10°	<b>°</b>	°-	-10	<b>'</b>	+10	OFF
SCHEDULE	£			-		-∢	EQ.	<del></del>			<del>'</del>			- <b>-</b> -	<del></del> -		· <b>A</b>	. — —						_	· <u>-</u>	<del></del>			-∢
CONFIGURATION	ALTERNATE WING (AW)	+ LOW TAIL	+ LOW TAIL	AH + MID TAIL	AN + T-TAIL	AW W/O TAIL	BASIC 603E	+ LOW TAIL	+ LOW TAIL	+ MID TAIL	+ MID TAIL	+ T-TAIL	+ T-TAIL	603E W/O TAIL	603E W/O TAIL	603E W/O TAIL	: + LOW TAIL	: + LOW TAIL	M071 +	+	+ MID TAIL	+ T-TAIL	: + T-TAIL	T-TAIL	AW + MID TAIL	LOW TAIL	· LOW TAIL	+ LOW TAIL	AW W/O TAIL
CONFIGURATION NUMBER C	ALTE	Þ 2	+	+ MV +	+ MV +	M MY 9 4	D 7 BASI	+ σο Δ	+ 6 4	-+	+ +	12 +	13 +	₹ 914 603E	Z 12 €03E	₹ 16 603E	▶ 17 603E	▶ 18 603E	▶ 19 603E	20 603E	21 603E	22 603E	23 603E	24 AN +	25 AW +	> 26 AW +	⊳ 27 AW +	⊳ 28 AW +	M MV 62 4

 $\alpha$  SCHEDULE: A = -4°, -3°, -2°, ...10°, 2° INCREMENT TO MAX  $\alpha$ ;

 $B = -4^{\circ}, -2^{\circ}, 0^{\circ}, \dots, 2^{\circ}$  increment to max a.

# DISTRIBUTION LIST

Office of Naval Research 800 North Quincy Street Arlington, Virginia 22217 R. E. Whitehead, Scientific Officer C. E. Anderson, Administrative Contracting Officer	1
Director Naval Research Laboratory Washington, D.C. 20375	
Code 2627	6
Office of Naval Research Branch Office 536 South Clark Street	
Chicago, Illinois 60605 Room 286	1
Defense Technical Information Center Bldg. 5, Cameron Station	
Alexandria, Virginia 22314	12
NASA/Ames Research Center Aerodynamics Research Branch	
Moffett Field, California 94035 R. M. Hicks, M.S. 227-8	1
Naval Air Systems Command	
Washington, D.C. 20361 D. G. Kirkpatrick	1